




ARIMAS DE DANZA

PVC DE DANZA

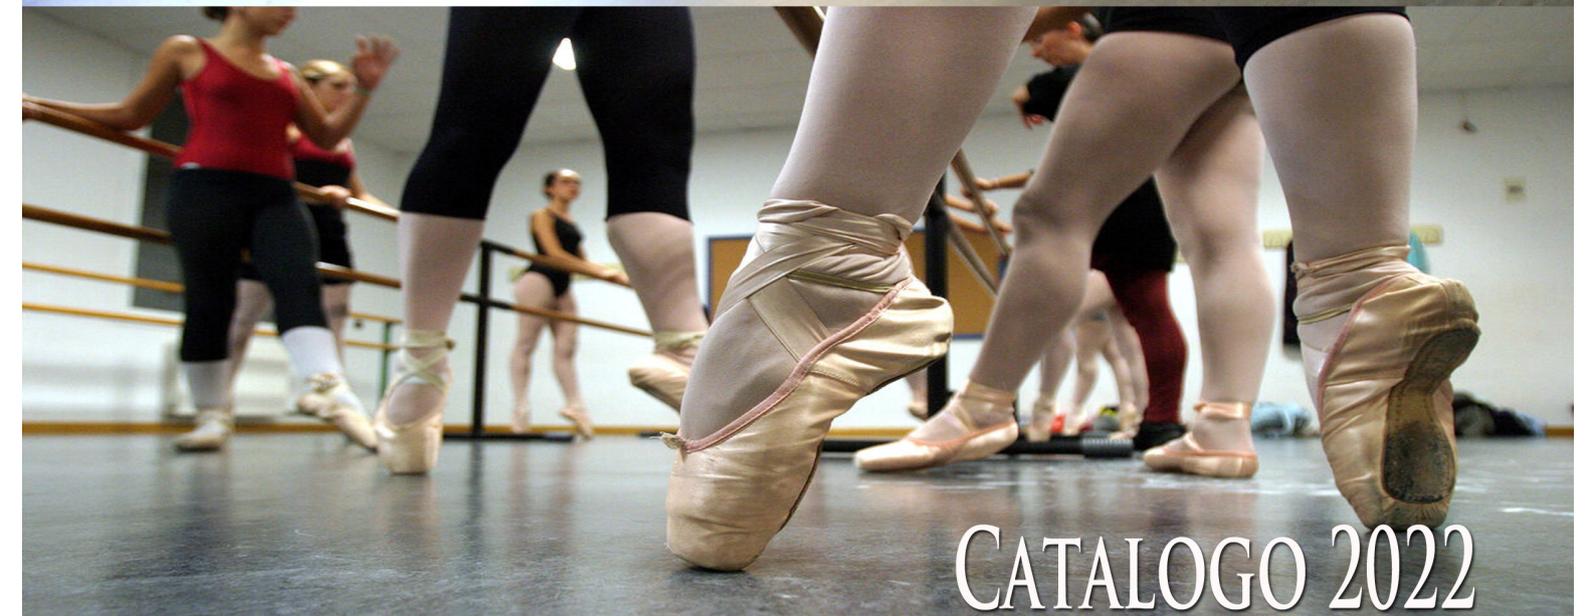

CATALOGO 2022



LINOLEUM

PVC HOMOGÉNEO DE DANZA

LOS PVC ESTÁN INDICADOS PARA CUALQUIER TIPO DE DANZA, YA QUE SU AGARRE MEDIO LOS HACE MULTIDISCIPLINARES. Y ESTÁN INDICADOS PRINCIPALMENTE PARA LA DANZA ESPAÑOLA Y EL FLAMENCO YA QUE TIENEN UNA GRAN DURABILIDAD Y RESISTENCIA. AL SER HOMOGÉNEOS SIEMPRE VEREMOS EL COLOR ELEGIDO AUNQUE SE DESGASTE O SE RALLE.

ESTE MATERIAL SE PUEDE COLOCAR MEDIANTE COLA O CINTA DE DOBLE CARA, PUDIENDO TERMOSELLAR (SOLDAR) LAS JUNTAS. ELIMINANDO ASÍ LAS CINTAS EN LAS UNIONES.

SE COMERCIALIZA EN ROLLOS DE 2 METROS DE ANCHURA Y EN DIFERENTES METRAJES DE LARGO DEPENDIENDO DEL GROSOR. 1,5MM, 2MM, 2,5MM Y 3MM.

NOSOTROS SOLEMOS INSTALAR EL DE 1,5MM, DISPONIBLE EN AQUELLAS REFERENCIAS QUE TENGAN UN (*) JUNTO A SU NUMERO DE REFERENCIA.

A CONTINUACIÓN ENCONTRAREIS LA CARTA DE COLORES Y LAS ESPECIFICACIONES TECNICAS. TODOS LOS MODELOS HACEN AGUAS TIPO AMARMOLADO O TIPO GRANITO. PERO TAMBIÉN DISPONEMOS DE UN NEGRO SOLIDO FUERA DE CATALOGO.

PARA SOLICITAR PRESUPUESTOS HÁGANLO POR EMAIL INDICANDO LA CANTIDAD, REFERENCIA Y LUGAR DE ENVIO O DE INSTALACIÓN.

CARPINTERIA@TARIMASDEDANZA.COM

+34645354727



8740



8640*



9240



9010*✓



9340*✓



9200*✓



9180*




9110*✓



9120*



9190



9300✓



8580



9080*✓



9220*



9040*✓



9170



100% RECYCLABLE
25% RECYCLED MATERIAL

GAUGE	COLOURS
2.0mm	16 ex stock
*1.5mm	10 ex stock
✓2.5mm, 3.0mm	7 ex stock

- BRE Green Guide to Specifications A+rating ENP 336
- Hardwearing, homogeneous commercial floorcovering
- Duotone marbled decoration

SPECIFICATION

			300 x 300mm	608 x 608mm	
1.5mm		2m x 27.5m = 55m ²	-	-	2360g/m ²
2.0mm		2m x 20m = 40m ²	4.5m ²	5.17m ²	3200g/m ²
2.5mm		2m x 15m = 30m ²	3.6m ²	-	4200g/m ²
3.0mm		2m x 13m = 26m ²	2.97m ²	-	5010g/m ²

GENERAL PERFORMANCE
 EN 649
 ASTM F1913
 ASTM F1700

1.5mm ₂₃ ₃₂ ₄₁

2.0mm, 2.5mm, 3.0mm ₂₃ ₃₄ ₄₃

REACTION TO FIRE
 EN 13501-1 Class Bfl-S1 { EN ISO 9239-1 ≥8kw/m²
 EN ISO 11925-2 Pass
 ASTM E662 <450 (1.5, 2.0mm) **ASTM E648 Class 1** (1.5, 2.0mm)

SLIP RESISTANCE
 EN 13893 Class DS
 AS/NZS 4586 R9

ABRASION RESISTANCE
 EN 649 Group M


ELECTRICAL BEHAVIOUR
 (body voltage)
 EN 1815 ≤2kV
 Classified as 'antistatic'

MARITIME USAGE †2.0mm
 Marine Equipment Directive †
 96/98/EC
 SOLAS 74

VOC EMISSIONS
 AgBB VOC test: Pass
 Floorscore certified (SCS Certificate Reg No: SCS-FS-02034)
 Finnish M1 Classification: Pass
 Ecospecifier Green Tag: Pass

CASTOR CHAIR
 (continuous use)
 Suitable

INDENTATION RESIDUAL
 ASTM F970 (Modified)
 Static load 750psi



CANARI




CARMEL



TOBACCO




SAND




GOLD




KORK




ORANGE



CORAL




SILVER




BONE



AQUA



COBALT




STEEL




FOG

0.1%
AVERAGE

**DIMENSIONAL
STABILITY**
EN ISO 23999



INDIGO




MOCCA



ANTHRACITE



CACTUS



KIWI

CONSTRUCTION		STANDARDS	FORTIS
DESCRIPTION			
Construction			homogeneous
Binder content	EN ISO 10581		Type I.
Total thickness	EN ISO 24346		2.0 mm
Wear layer thickness	EN ISO 24340		2.0 mm
With of rolls	EN ISO 24341		2 m
Length of rolls	EN ISO 24341		20 lm
Total weight	EN ISO 23997		2.8 kg/m ²
CLASSIFICATION			
European classification	EN 685		class: 34/43
PERFORMANCE			
Abrasion group	EN 660-1		T
Residual indentation	EN ISO 24343		max. 0.1 mm
Dimensional stability	EN ISO 23999		max. 0.2 %
	EN ISO 23999		average 0.1 %
Fire resistance	EN 13501-1		class: Bfl-s1
Slip resistance	DIN 51130		R9
	EN 13893		class: DS
Electrical resistance	EN 1815		< 2 kV
Chemical resistance	EN ISO 26987		✓
Light fastness	EN 20105 B02		grade 6
Castor chair resistance	EN ISO 4918		✓
Seaming method			hot or cold welding
Bacteria and fungi resistance	EN ISO 846:1999		does not favour growth
Warranty			10 year

LINOLEUMS Y PVC HETEROGÉNEOS DE DANZA

LOS LINOLEUMS ESTÁN INDICADOS PARA CUALQUIER TIPO DE DANZA, YA QUE SU RESISTENCIA LOS HACE MULTIDISCIPLINARES. PERO ESTÁN INDICADOS PRINCIPALMENTE PARA LA DANZA CLÁSICA YA QUE TIENEN UNA UN AGARRE MAYOR QUE EL PVC.

LOS MODELOS REVERSIBLES NO SE PUEDEN TERMOSELLAR, PERO LOS DE UN SOLO COLOR SÍ ES POSIBLE.

LA COLOCACIÓN ES LA MISMA QUE EL PVC. EN LOS MODELOS REVERSIBLES NO ES POSIBLE EL TERMOSELLADO TENIENDO QUE PONER CINTAS EN LAS UNIONES.

SE COMERCIALIZA EN ROLLOS DE 2 METROS DE ANCHURA Y EN DIFERENTES METRAJES DE LARGO DEPENDIENDO DEL GROSOR.

LA GAMA UNIFLOOR ES UN PVC HETEROGÉNEO DE COLORES LISOS, NO INDICADO PARA ACTIVIDADES CON MUCHO DESGASTE.

CONSULTA LA CARTA DE RECOMENDACIONES PARA ELEGIR EL QUE MEJOR SE AJUSTE A TUS NECESIDADES.

DISPONEMOS DE CINTAS ADHESIVAS PARA LAS UNIONES.

PARA SOLICITAR PRESUPUESTOS HÁGANLO POR EMAIL INDICANDO LA CANTIDAD, REFERENCIA Y LUGAR DE ENVÍO O DE INSTALACIÓN.

CARPINTERIA@TARIMASDEDANZA.COM

+34 645 354 727



PERFORMANCE

PERFORMANCE



- > **WIDE PRODUCT RANGE**
from dance to every kind of entertainment areas
- > **SOLVENT FREE**
environmentally friendly production technology and lifespan
- > **DIMENSIONAL STABILITY**
the glass fiber reinforcement in Grabo heterogeneous floors ensures minimal dimensional change resulting from temperature fluctuation
- > **EASY TO INSTALL**
excellent flexibility and moderate weight of the products result in easy handling and effortless roll-out for portable and permanent installation as well
- > **EASY TO CLEAN**
special surface treatment ensures that stubborn dirt can be removed easily while the original colour and appearance of the floor is being protected

CATWALK STAGE EVENT EXHIBITION SHOW

LAS VEGAS LUX

TOTAL THICKNESS	WEAR LAYER	TOTAL WEIGHT	ROLL WIDTH-LENGTH
2.0	0.35	1.3	1.5x25
mm	mm	kg/m ²	m



1137




1240



1217



4212



1991



1596



6402

DANCE (ALL TYPE) HIP-HOP AEROBIC THEATER CONCERTS CINEMA

EVIDENCE 25

TOTAL THICKNESS	WEAR LAYER	TOTAL WEIGHT	ROLL WIDTH-LENGTH
2.5	0.7	3.5	2x20
mm	mm	kg/m ²	m



1290 275

EVIDENCE 60


TOTAL THICKNESS	WEAR LAYER	TOTAL WEIGHT	ROLL WIDTH-LENGTH
6.0	0.7	3.3	2x20
mm	mm	kg/m ²	m



1991 275

BROADWAY 20

TOTAL THICKNESS	WEAR LAYER	TOTAL WEIGHT	ROLL WIDTH-LENGTH
2.0	0.7	2.7	2x20
mm	mm	kg/m ²	m



1991 275



1137 275



2010 275



1220 275







1991/1535

BALLET DANCE STAGE EVENT SHOW TV STUDIO

PLIÉ

TOTAL THICKNESS	WEAR LAYER	TOTAL WEIGHT	ROLL WIDTH×LENGTH
2.0 mm	0.9 mm	2.5 kg/m ²	2×20 m

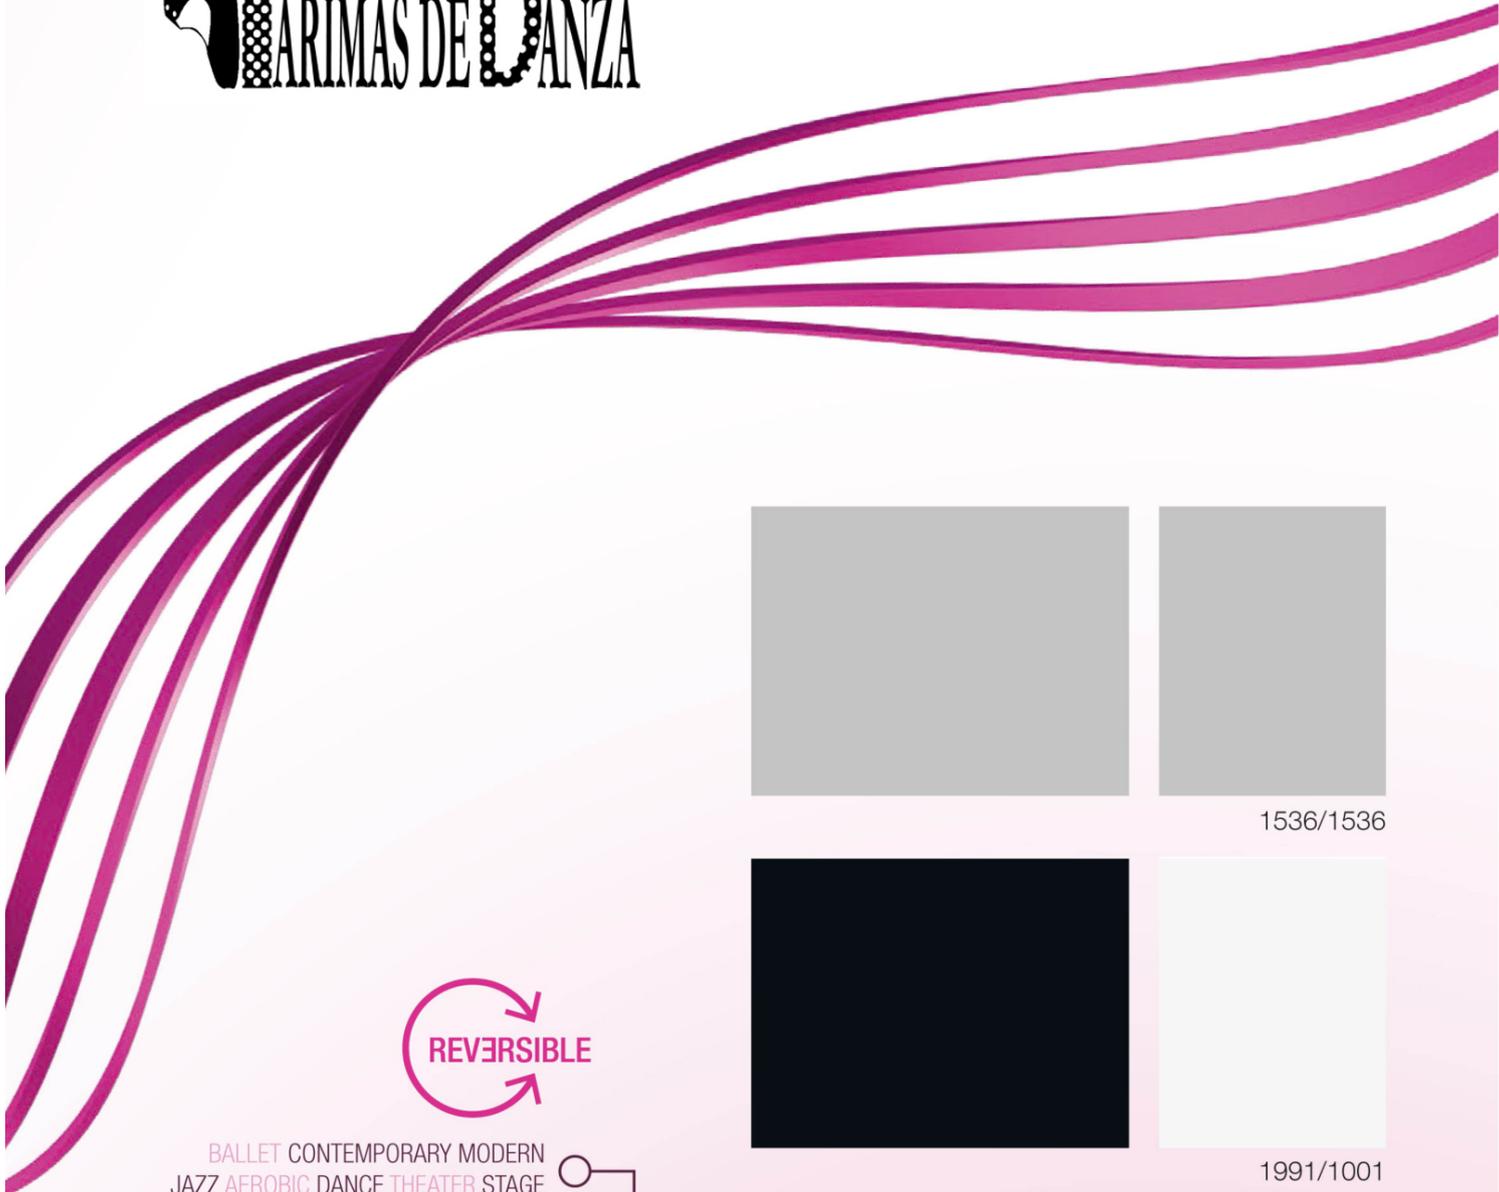

1536/1536



1991/1001



BALLET CONTEMPORARY MODERN
JAZZ AEROBIC DANCE THEATER STAGE


GRABOLETT

BROADWAY 17

TOTAL THICKNESS	WEAR LAYER	TOTAL WEIGHT	ROLL WIDTH×LENGTH
1.7 mm	0.7 mm	2.1 kg/m ²	2×20 m



1991/1535



1001



1535



1991



BALLET DANCE STAGE EVENT SHOW TOUR
TV STUDIO THEATER CINEMA

BALLERINA

TOTAL THICKNESS	WEAR LAYER	TOTAL WEIGHT	ROLL WIDTH×LENGTH
1.5 mm	0.5 mm	2.0 kg/m ²	2×20 m






BALLET TOUR DANCE STAGE EVENT

DUETT

TOTAL THICKNESS	WEAR LAYER	TOTAL WEIGHT	ROLL WIDTH×LENGTH
1.4 mm	0.5 mm	1.8 kg/m ²	2×20 m

6875/1008

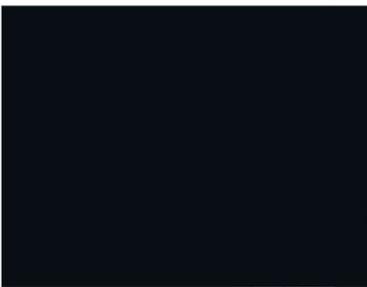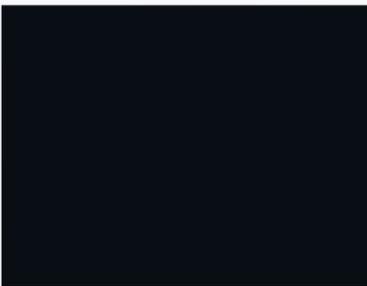

6875/1535





STAGE EVENT SHOW
RECORDING STUDIO CASINO
DISCO/PUB WALLCOVERING

UNIFLOOR

TOTAL THICKNESS
2.0
mm

WEAR LAYER
0.35
mm

TOTAL WEIGHT
1.3
kg/m²

ROLL WIDTH x LENGTH
2 x 25
m



2258



4015



5910



5855




7203



7303



7539



7120



6115



6152



1991



6402



3060



6027



6271




1596



1571



1240



1217




1220



7015



1137



1001



4410



4212



3223



2010

IF YOU ARE LOOKING FOR A FLOOR COVERING FOR AN APPLICATION BELOW,
YOU ARE ON THE BEST PLACE



	Event floor		Ballett dance floor				All purpose dance floor		
	matt	gloss							
	Unifloor	Las Vegas Lux	Pilé	Grabolett	Duett	Ballerina	Broadway 20	Evidence 25	Evidence 60

DANCE


Ballet			★★★	★★★	★★★	★★★	★★		
Contemporary modern	★		★★	★★	★★	★★	★★★★	★★★★	★★★★
Jazz, aerobic, hip-hop	★		★	★	★	★	★★★★	★★★★	★★★★
Folk flamenco			★★	★★	★★	★★	★★		
Tap			★	★	★	★			
Ballroom dancing			★	★	★	★	★		
Multidance	★		★★	★★	★	★★	★★★★	★★	★★

ENTERTAINMENT

Theater	★★★★		★★★★	★★★★	★★★★	★★★★	★	★★	★
Tour	★★★★		★★	★★	★★★★	★★	★★	★★	
Event, exhibition, show	★★★★	★★★★	★★	★★	★★★★	★★	★★	★★	★
TV-, film-, recording studio	★★		★★★★	★★	★★	★★	★★	★★	
Cinema	★		★	★	★	★	★		
Casino, disco/club	★					★	★		
Product used as decoration, wallcovering	★★★★	★★★★							

If you do not find exactly what you need, in performance or color, please contact us, as there are many more products and designs we were not able to include in this book but might be in our warehouse already.

Balls
Parties
Exhibitions
Weddings

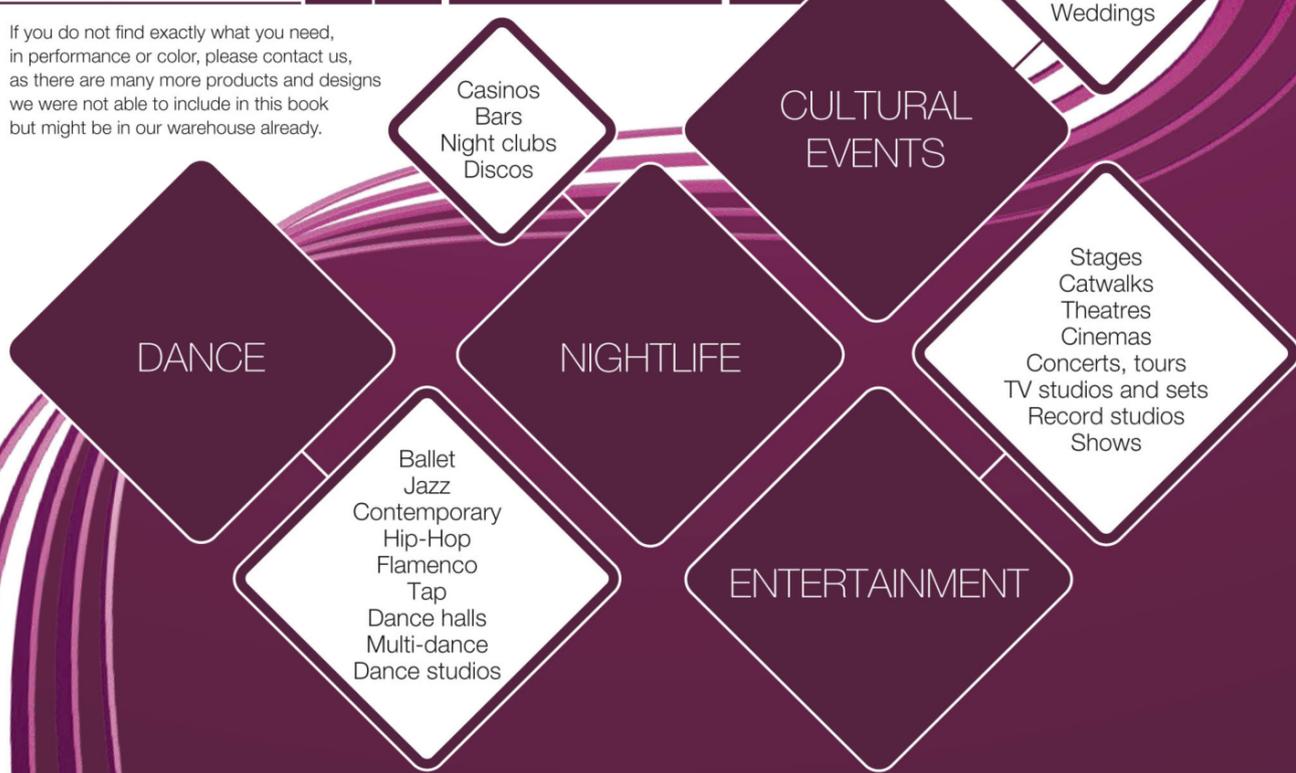

PERFORMANCE

CONSTRUCTION	UNITS	STANDARDS	Unifloor	Las Vegas Lux	Pilé	Duett	Ballerina	Grabolett	Broadway 20	Evidence 25	Evidence 60
DESCRIPTION											
Construction			●	●	■	■	■	■	■	■	■
Total thickness	mm	EN 24346	2.0	2.0	2.0	1.4	1.5	1.7	2.0	2.5	6.0
Wear layer thickness	mm	EN 24340	0.35	0.35	0.9	0.5	0.5	0.7	0.7	0.7	0.7
Width	m	EN 24341	2	1.5	2	2	2	2	2	2	2
Length of rolls	m	EN 24341	25	25	20	20	20	20	20	20	20
Total weight	kg/m ²	EN 23997	1.3	1.3	2.5	1.8	2.0	2.1	2.7	3.5	3.3
PERFORMANCE											
Abrasion group	group	EN 660-1	T	T	T	T	T	T	T	T	T
Residual indentation	max.mm	EN ISO 24343	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2
Dimensional stability	max. %	EN ISO 23999	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Fire resistance	class	EN 13501-1	C _s -S1	B _{fl} -S1	B _{fl} -S1	B _{fl} -S1	B _{fl} -S1	B _{fl} -S1	B _{fl} -S1	C _s -S1	C _s -S1
Slip resistance	class	EN 13893	DS	DS	DS	DS	DS	DS	DS	DS	DS
Light fastness	grade	EN 20105 B02	6	6	6	6	6	6	6	6	6
Chemical resistance		EN ISO 26987	✓	✓	✓	✓	✓	✓	✓	✓	✓
Castor chair resistance		EN ISO 4918	✓	✓	✓	✓	✓	✓	✓	✓	✓
Surface treatment			CLP	CLP	CLP	CLP	CLP	CLP	CLP	CLP	CLP
Anti-bacterial and fungicid treatment			grabo SAN	grabo SAN	grabo SAN	grabo SAN	grabo SAN	grabo SAN	grabo SAN	grabo SAN	grabo SAN
Seaming method			heat or cold weld								
Application			temporary permanent	temporary	temporary permanent	temporary permanent	temporary permanent	temporary permanent	temporary permanent	temporary permanent	permanent

● heterogeneous ■ compact heterogeneous



TARIMAS DE DANZA